

# Printable wall covering- APPLICATION INSTRUCTION

Wall covering of 230 g/m<sup>2</sup>, composed of a pre-pasted, non-woven, PVC-free paper.

## PREPARE YOUR APPLICATION SURFACE

Our wall coverings can be applied to a wide variety of substrates as long as the target surface is clean, dry and free from any traces of oil, grease, dust, silicone or other contaminants.

To avoid unexpected outcomes, always assume that every substrate is dirty and needs to be cleaned.

## RECOMMENDATIONS:

Apply wall coverings only to a clean, smooth and dry surface.

For optimum results:

- All the irregularities and imperfections of the surface must be filled in and rubbed down.
- Apply to a uniform white wall.

Painted surfaces must be dry and hardened. For fresh paint, a drying time of 7 - 10 days is required before applying the wall covering. Paint that is not sufficiently dry can degas. Covering such a surface would result in lifting and bubbles.

The humidity of the surface can impair the adhesion strength of the covering. Make sure that the wall is perfectly dry and that there is no trace of infiltration, humidity, mold, condensation, etc.


This wall covering is pre-pasted. The paste must be water-activated and does not require any additional adhesive.

## APPLICATION:

If needed, before applying the paper, you can use a pencil to draw markers on the wall in order to position the first lay strip correctly.

Fill wallpaper sprayer with water. Pump handle to create pressure.  
Lay strips, pattern side down, on floor or table covered with a drop cloth or towel to protect against any overspray of water

Using the wallpaper sprayer, activate the paste with a fine mist of clean water to entire back of the pre-pasted surface, paying close attention to the edges.

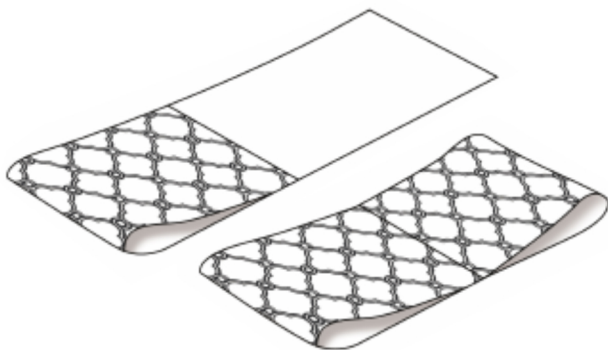

Fold top and bottom of sheet toward center, paste to paste, allowing folded strip sit for approximately 1-2 minutes to relax paper and fully activate paste

Take moistened strip to the wall and smooth into place using a squeegee or sponge.

Repeat procedure for each subsequent strip, trimming excess wallpapers for doors and windows with razor knife.



**WALL CREATIONS**

Should you have any additional enquiry concerning INSTALLATION, please contact us :

☎ +961 70 172 662 ✉ hello@wall-creations.com 📍 Serhal Hospital Street – Rabweh – Lebanon

# Printable wall covering- APPLICATION INSTRUCTION

Wall covering of 230 g/m<sup>2</sup>, composed of a pre-pasted, non-woven, PVC-free paper.

Adjust the height of the length if necessary to make match potential patterns.

Firmly apply over the length's edges and wipe excess paste from the front of each strip with a sponge and clean water.

The product is dimensionally stable, the application must be carried out edge to edge.

## CLEANING AND MAINTENANCE:

The printable wall covering can be washed using:

- a mild detergent such as washing-up liquid diluted in room temperature water and a natural sponge if there are slight contaminants or dust that must be removed.
- a mild detergent such as washing-up liquid diluted in hot water and a natural sponge if more intensive cleaning is required.

Dab the area to be cleaned with the sponge to limit the risk of abrasion.

Then rinse with a sponge soaked with clear water, still dabbing carefully.

Dry the surface with a clean, absorbing cotton cloth.



**WALL CREATIONS**

Should you have any additional enquiry concerning INSTALLATION, please contact us :

☎ +961 70 172 662 ✉ [hello@wall-creations.com](mailto:hello@wall-creations.com) 📍 Serhal Hospital Street – Rabweh – Lebanon